

ROK

BOAT STANDS™

ROK BOAT STANDS USER MANUAL




**** PLEASE READ AND UNDERSTAND THIS MANUAL ENTIRELY BEFORE USING ROK BOAT STANDS ****

BROWNELL TRAILERS LLC. 129 ALDEN RD FAIRHAVEN MA 02719




ROK BOAT STANDS USE WITH SAIL BOATS

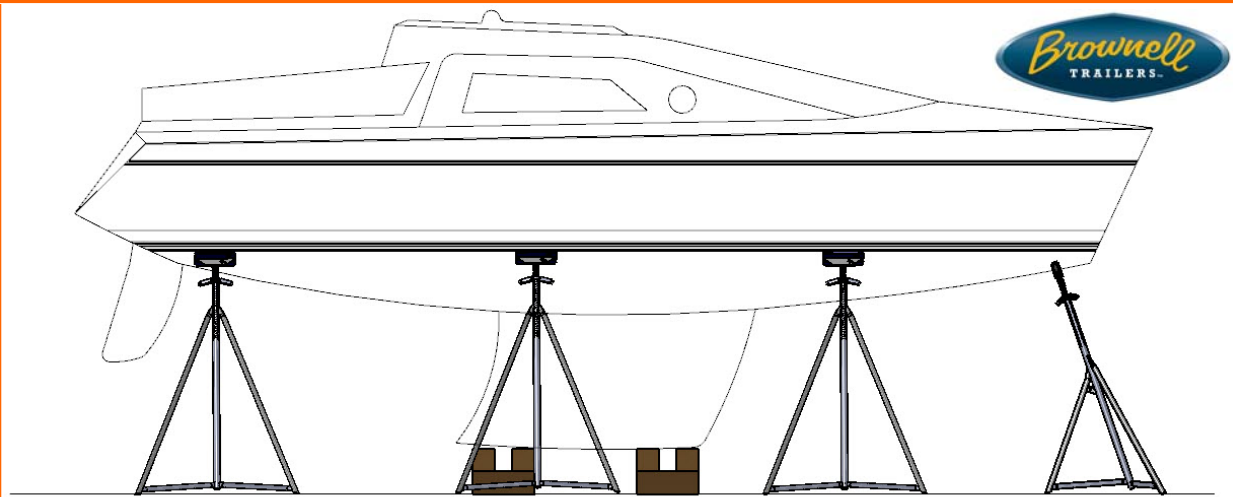

- We recommend spacing ROK stands evenly along the length of the boat with no more than 6-8 feet between each stand.
- For boats that have the rigging on, we suggest adding one extra set of ROK stands to make sure the boat is secure in heavy winds.
- Proper keel blocking is important. Use either 6" or 8" wooden blocks below the front and back of the keel to make sure the base is stable for the boat.
- We suggest using a small piece of plywood or other solid material below each leg to prevent the leg from sinking when the ground is loose.
- Turn the ROK stand until the forward leg is pointing towards the boats center line.
- Always try to keep the Adjustable Top perpendicular or 90 Degrees to the hull of the boat.
- Put the safety chain in the provided slot, and tighten up by gently pulling each ROK stand equally away from the hull of the boat and then tighten the screw jacks.
- If one pair of stands are placed facing the keel or if the boat has a longer keel, pull the safety chain below the keel and up on the other side.
- For increased stability at the bow always use a V-top stand.

****Warning! Never tie anything to the ROK stand as stands are meant only to support the boat, any additional equipment may impair use.***

ROK BOAT STANDS USE WITH POWER BOATS

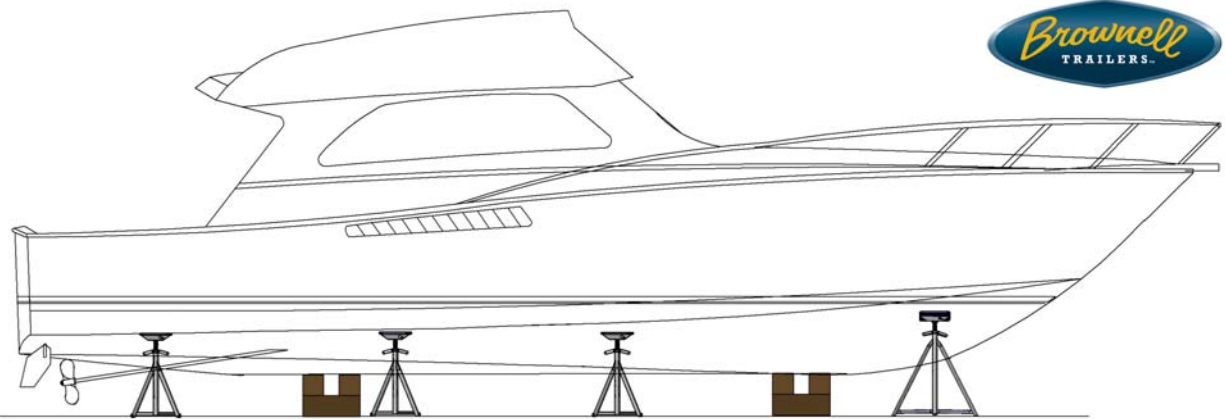

- We recommend spacing ROK stands evenly along the length of the boat with no more than 6-8 feet between each stand.
- Proper keel blocking is important. Use either 6" or 8" wooden blocks below the front and back of the keel to make sure the base is stable for the boat.
- Place the center wooden block below where the engine is to make sure it has good keel support.
- Make sure wooden blocks are in good condition to ensure proper support.
- Always try to keep the Adjustable Top perpendicular or 90 Degrees to the hull of the boat.
- Place the stands as wide as possible for best stability and maximum safety.
- For power boats with a deep V bow construction, ROK sail boat stands fit best under the forward keel.
- Put the safety chain in the provided slot, and tighten up by gently pulling each ROK stand equally away from the hull of the boat and then tighten the screw jacks.

****Warning! Never tie anything to the ROK stand as stands are meant only to support the boat, any additional equipment may impair use.***

For Proper Size & Number of ROK Stands

Please visit www.ROKBoatStands.com to use our boat stand calculator. Simply enter your boat length, beam and draft for a customized stand suggestion.